


Standard Features

- Synchronizes PC to ± 2 milliseconds of time code reference
- References IRIG-B, SMPTE, EBU time codes
- Automatic time code detection
- Balanced and unbalanced time code inputs
- Provides millisecond accuracy to Windows applications
- Fully configurable time zone and Daylight Saving Time offsets
- PCIe revision 2.0 – slot compatible X1 through X16
- LED status indicator

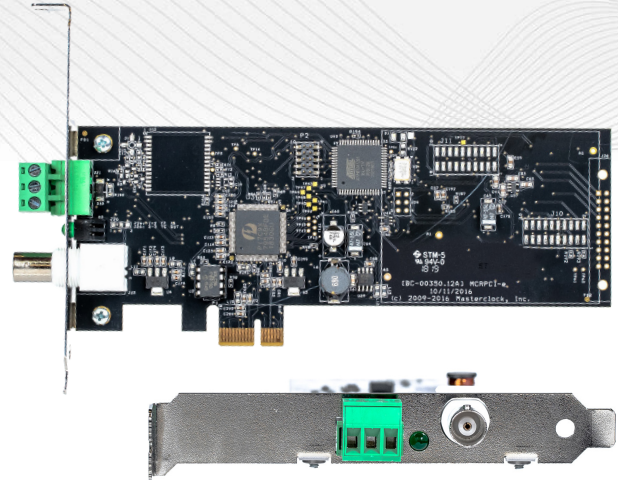

Specifications

TIME CODE INPUTS

- SMPTE (30/25/25 fps - non-drop frame only) to Leitch Date Encoding Standard
- IRIG-B pulse width coded (unmodulated) DC, IEEE 1344 standard
- IRIG-B(1) 1 kHz Amplitude Modulated, IEEE 1344 standard

SUPPORTED DRIVERS

- Windows XP (32 bit)
- Windows 7/8/10 (32 & 64 bit)
- Windows Server 2003 R2/2008 R2/2010 R2/2012 R2/2016
- Linux

SOFTWARE

- API software development kit and documentation is provided for designers
- Windows OS requires .Net Framework 4.0 and a Windows Visual Studios C++ to be installed

PHYSICAL

- Length: 6.6 in (167.6 mm), Height: 2.712 in (68.8 mm)
- Low profile card and bracket standard; Full height bracket included

OPERATING PARAMETERS

- Temperature: 0 to 60 °C
 - MTBF: 1,570,000 hours
- All calculated using Fixed/Ground Mil HDBK 217F assumption

COMPLIANCE

- FCC, ROHS, CE Marked, ANSI

HOLDOVER ACCURACY

- With loss of power or time reference synchronization, device reverts to an internal battery-backed real-time clock chip with accuracy of ± 1 min/year

5-YEAR LIMITED PARTS & LABOR WARRANTY **MADE IN THE USA**

US/CAN: (800) 940-2248 INTL: +1 (636) 724-3666 sales@masterclock.com

Masterclock.com